

M-159TG Mixing Unit-Hose Stations

Strahman M-159 (bronze) and M-750 (stainless steel) Mixing Units-Hose Stations are designed to thoroughly mix hot and cold water in any desired proportion. Available in both standard M-159, M-750 and M-159TG, M-750TG Series.

Our Temperature Indicating (TG) models are equipped with a blending chamber and quick acting dial-type dual Fahrenheit and Centigrade temperature gauge, which accurately indicates the water's temperature exiting a specially designed blending chamber.



Specifications

- ◆ **Maximum water temperature:** 200°F/93°C
- ◆ **Maximum working pressure:** 150 psi
- ◆ Standard: bronze, optional chrome-plated
Available: M-750, stainless steel
- ◆ Standard with globe valves, available with ball valves
- ◆ Simple visual recognition of valve position
- ◆ Flow rates adjustable from low to high

NOTE: Not suitable for steam service

Please see reverse side for parts listing.

Shown: Bronze M-159TG with globe valves;
shown with premium hose assembly and M-70 Series nozzle
Available: Standard M-159, stainless steel M-750 and M-750TG



USA Headquarters

2801 Baglyos Circle ♦ Bethlehem, PA 18020

Phone: (484) 893-5080 ♦ Fax: (484) 893-5099 ♦ Toll Free: (877) STRAHMAN

www.strahmanvalves.com

France

Savoie Hexapole, F-73420 Mery, France

Tel: 33 (0) 4 79 35 78 00

Fax: 33 (0) 4 79 35 78 20

Germany


Zum Schwarzhof 14, 77704, Oberkirch, Germany

Tel: 49 (0) 7802 - 7037879


Fax: 49 (0) 7802 - 7037889

M-159TG Mixing Units-Hose Stations

ANGLE VALVE - BACK ENTRY

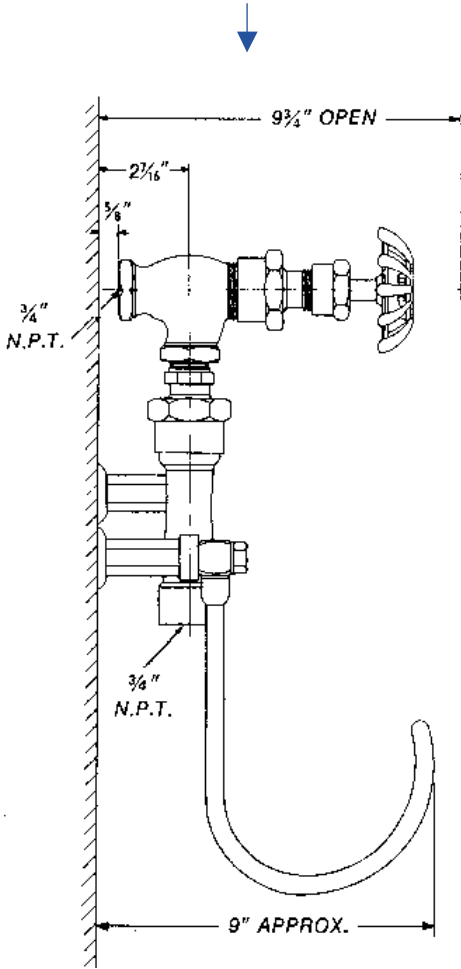

GLOBE VALVE - TOP ENTRY

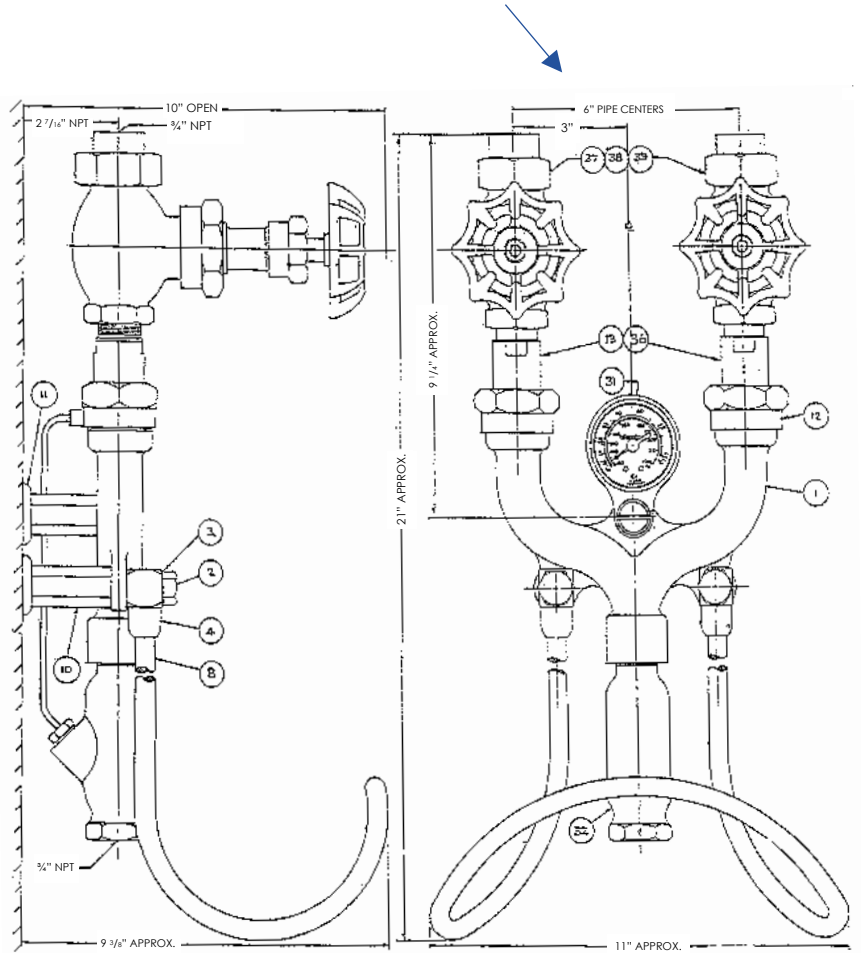

PARTS

PART NO.	PART	MATERIAL
1	BODY	BRONZE
2	CAP SCREW	SST
3	LOCK WASHER	SST
4	HOSE RACK CONNECTOR	SST
8	HOSE RACK	SST
10	SPACER	SST
11	WALL PLATE	SST
12	UNION NUT	BRASS
13	CHECK VALVE	BRASS/SST/BRONZE
31	TEMPERATURE GAUGE	SST
32	BLENDING CHAMBER	BRONZE
36	CHECK VALVE GASKET	NON ASBESTOS
37	INLET UNION NUT	BRASS
38	UNION TAIL PIECE	BRASS
39	BODY GASKET	NON ASBESTOS