


Non-Slamming Changeover Valve

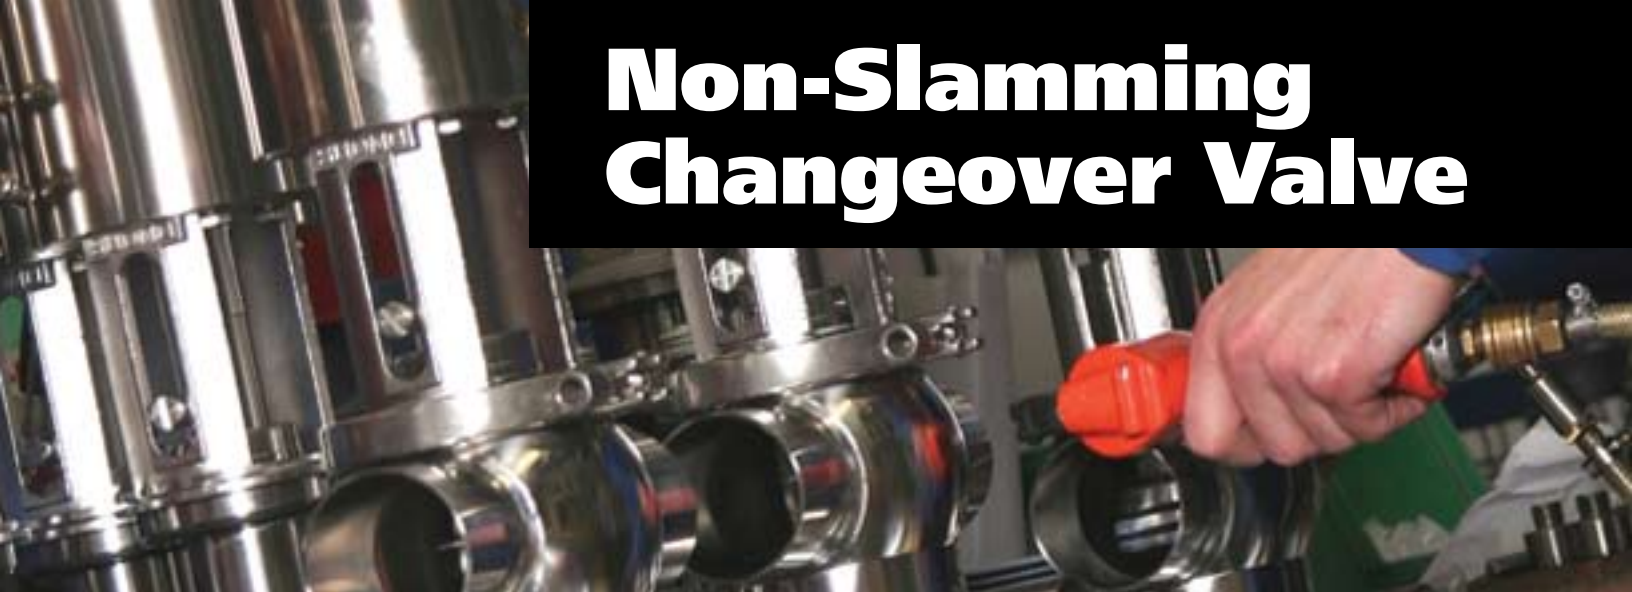

Product Features

Norit Südmo offers a Non-Slamming Changeover Valve for use in multi-circuit product or CIP distribution systems where shifting circuits under pump fluid pressure is required. The non-slamming feature allows smooth operation of the valve without the problems of hydraulic shock and water hammer.

Norit Südmo's Non-Slamming Changeover Valve offers many proven advantages including a machined body, maintenance-free field reversible actuator, balanced stem design, and a sealed control top for pneumatic interface and position feedback. In addition, no special tools are required for replacing seals.

Norit Südmo's Non-Slamming Changeover Valves meet the ASME BPE geometry standards, ASTM standards for metallurgy and carry the 3A symbol.

Available in sizes ranging from 1 to 4 inches, Norit Südmo's Non-Slamming Changeover Valve is backed by our proven technology, superior service and extensive application know-how.

