



P R E S S U R E
T E M P E R A T U R E
L E V E L
I N S T R U M E N T A T I O N
F L O W
A N A L Y T I C A L

"HMP" Turbine Flowmeter

- *Durable stainless steel shaft and Rulon® sleeve bearing eliminates failure due to blow downs*
- *Two piece design allows for easy access to internals for inspection*
- *Designed to ASME BPE-2004 standards*
- *All 316L stainless steel construction*

The "HMP" series turbine flowmeter is suited for applications that require an economical and accurate measurement solution. The "HMP" is designed using the proven method of monitoring the rotation of a turbine rotor in a flowing product stream. This is not a modification of an industrial design but a flowmeter designed specifically for sanitary applications. Understanding the requirements of these applications has produced a flowmeter with superior durability. The all 316L SS

construction (including rotor), along with a unique 2-piece housing design eliminates the need for internal locking rings to retain internal components. This makes for a truly cleanable design that also provides exceptional performance. When used with the HTS1000 probe, the non-magnetic sensing of the rotor eliminates drag - present in other magnetically sensed turbines. This lack of drag provides better accuracy and extended operational life. These features, coupled with a durable Rulon® bearing

and stainless steel shaft, give the "HMP" the ability to handle difficult process requirements such as steam blowdowns and the need to autoclave without difficulty.

Complete specifications and ordering information are available on the reverse side. For more information please visit our website at www.andinst.com or contact your local authorized Anderson distributor.



HMP Specifications

Environment

Fluid Temperature Range: 0 - 149°C (32 - 300°F)
Maximum Fluid Pressure: 10.3 Bar (150 psi) max
Maximum Fluid Viscosity: 100 cps max
Ambient Temperature Range: HTS1000: -40 - 79°C (-40 - 175°F)
HT75000: -54 - 107°C (-65 - 225°F)

Accuracy: ± .5% of rate over specified range
Repeatability: ± .1% of rate
Flow Ranges: HMP-075: 18.5-65 LPM(5-17 GPM)
HMP-100: 26.5-265 LPM(7-70 GPM)
HMP-150: 49-492 LPM(13-130 GPM)
HMP-200: 94-946 LPM(25-250 GPM)
Cleaning Methods: CIP/SIP/Autoclave @ 149°C (300°F)

Mechanical Specifications

Sanitary Connections: 1", 1 1/2" and 2" Tri-Clamp®
Gasket Material: PTFE Polytetrafluoroethylene
Bearing Material: Rulon® 123 (reinforced Polytetrafluoroethylene)
Product Contact Materials: 316L stainless steel, Rulon® 123, Teflon®, and GSP1325-2 (Epoxy Resin)
Surface finish: 20 Ra max, stainless steel surfaces electropolished
Hardware: Heavy duty Tri-Clamp® with live loaded clamp nut

DIMENSIONS:

MODEL	DIM "A"	DIM "B"	FITTING
HMP075 HMP100	3.25" (82.6mm)	5.88" (149.4mm)	1" T.C.
HMP150	3.63" (92.2mm)	6.13" (155.7mm)	1 1/2" T.C.
HMP200	3.88" (98.6mm)	8.63" (219.2mm)	2" T.C.

Electrical Specifications


Power / Signal

HTS1000
Supply Voltage: 8-24 VDC, 0.8 Watts maximum
Signal Output: 7.3-23.3 VDC, Unscaled, Pulsed Output
Output Units: pulses per volume


HT75000
Supply Voltage: None
Signal Output: 0.18-2.6 V.P.P, Unscaled, Frequency Output
Output Units: pulses per volume

Approvals


USP Class VI
Designed to meet ASME BPE-2004 standards
3-A compliant, Third party verified in accordance with standard 28-03
Material, Conformance and Calibration: Certificates provided with product, also available on-line using serial number

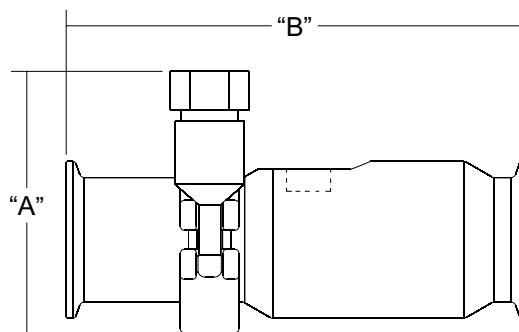

HOW TO ORDER

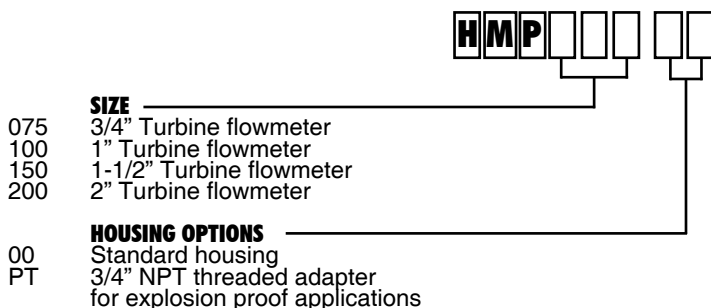

PROBE/DISPLAY OPTION

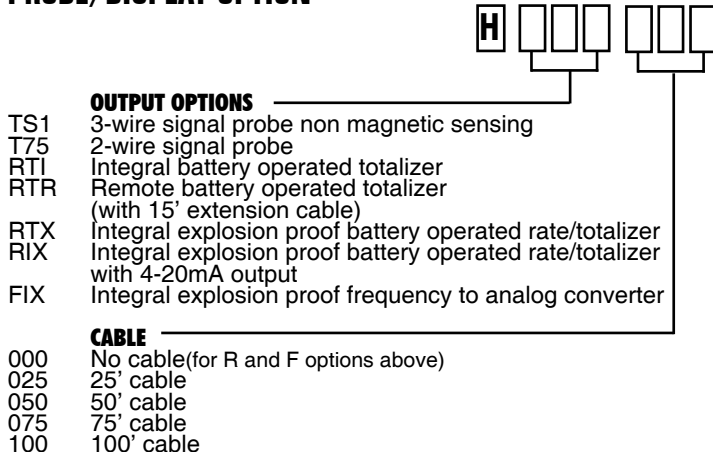

REPLACEMENT PARTS

Part Number	Description
HTS1000	3-wire pick-up probe
HT75000	2-wire pick-up probe
HMP600-075	3/4" Rebuild kit 316SS rotor
HMP600-100	1" Rebuild kit 316SS rotor
HMP600-150	1.5" Rebuild kit 316SS rotor
HMP600-200	2" Rebuild kit 316SS rotor

SPARE CABLES

Part Number	Description
Cable 3W-25	25' cable with connector
Cable 3W-50	50' cable with connector
Cable 3W-75	75' cable with connector
Cable 3W-100	100' cable with connector